




The G Sub 1201 is a particularly flat high-performance 12" subwoofer. With its large footprint it can accommodate GL- and other HiMid systems using speaker poles without toppling over. Easy handling, an exclusive and modern design and its deep bass reproduction make it a perfect choice for demanding applications.

PRODUCT SPECIFICATIONS

Speaker Components	12" Nd
Description	Passive Bass Extension
Power AES / Peak	500 W / 1500 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1 m	99 dB / 131 dB
Usable Range	36 Hz - 250 Hz (- 6 dB)
Tuning Frequency excursion minimum	47 Hz
Connectors	2 x Neutrik Speakon NL4MP in/out Coding: 1+/- loop thru, 2+/- Sub Incl. Switcher for active / passive operation
Handles	2 x
Rigging / Fittings	M20 on top
Weight	17,5 kg
Size height x width x depth	33,0 x 48,5 x 48,5 cm
Order No.	00610




Rubber Surround for large excursion.




Comfortable handles for easy transport.

DIMENSIONS

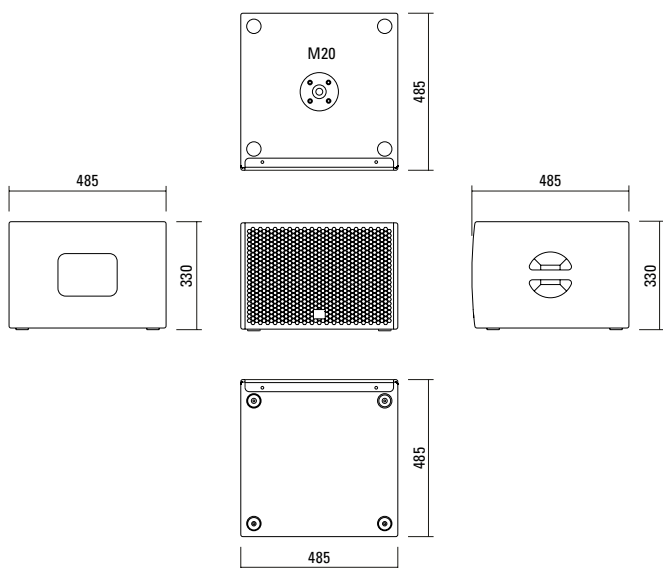


MEASUREMENTS

Frequency Response with Presets

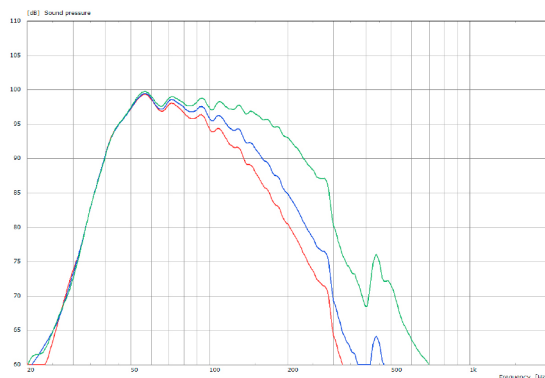

Sensitivity 1 W @ 1 m + Impedance

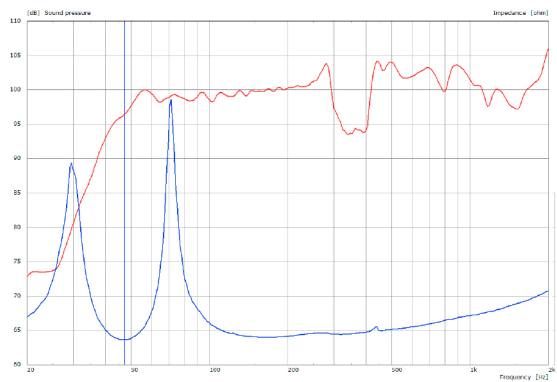

APPLICATIONS




G Sub 1201 / GL 16i



G Sub 1201 / L 16j



G Sub 1201 / TSM 8

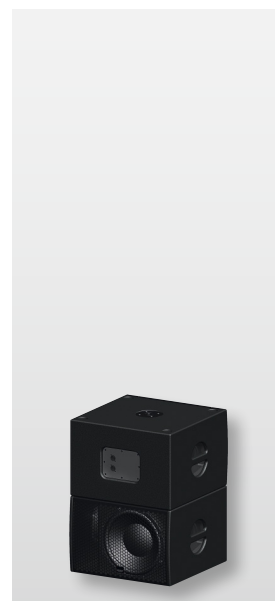

G Sub 1201 dp+ / G Sub 1201 (n.h.)
Cardiod set-up

ACCESSORIES G Sub 1201

Speaker Pole

M20, with wind up, K&M

Order No. **03023**



M20, adjustable, K&M

Order No. **03022**



Ceiling Mount

for Subwoofer, 2 parts,
incl. screws

Order No. **08129**

Order No. **08129/w** (RAL 9010)



Cover

for G Sub 1201, padded

Order No. **01237**

