





Multifunctional premium-class compact 2-way system. The coaxial configuration in combination with a carefully designed large-area horn ensures absolutely constant response even off the main axis. High-power Neodym drivers and long-excursion coils provide high efficiency and reduced distortion. Nine M10 threaded mounting points are available to mount MultiRigg hardware and other accessories for installation or mobile applications.

## PRODUCT SPECIFICATIONS

<b>Speaker Components</b>	10" Nd (3" VC) / 1" Nd (1,7" VC)
<b>Description</b>	Multifunctional Coaxial Sound System
<b>Power</b> AES / Peak	350 W / 1000 W
<b>Impedance</b> nominal	8 Ω
<b>SPL</b> 1 W / Peak @ 1 m	97 dB / 127 dB
<b>Usable Range</b>	60 Hz - 19 kHz (-6 dB)
<b>Tuning Frequency</b> Excursion minimum	70 Hz
<b>X - Overpoint</b> acoustical	1,2 kHz
<b>Coverage</b> horizontal / vertical	80° x 60° - rotatable
<b>Connectors</b>	2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- HiMid, 2 +/- loop thru
<b>Handles</b>	2 x
<b>Rigging / Fittings</b>	9 x M10 To be used with MultiRigg 35 mm pole mount
<b>Weight</b>	12,5 kg
<b>Size</b> height x width x depth	45,0 x 31,0 x 29,0 cm
<b>Order No.</b>	<b>01093</b>



## DIMENSIONS

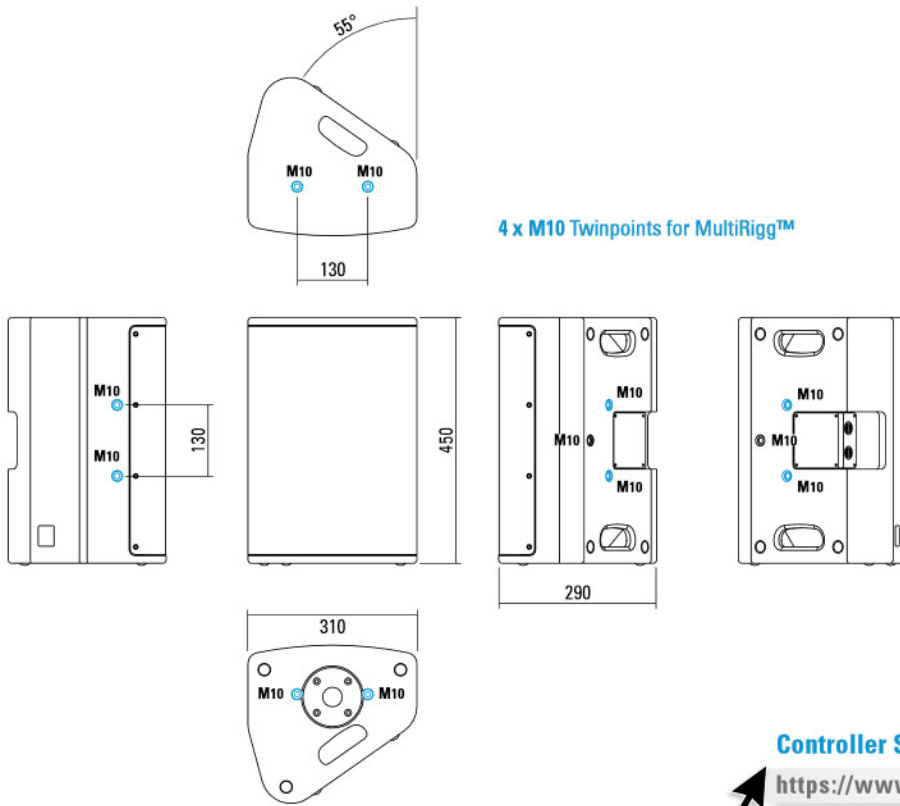


### Controller Setups:


 <https://www.seeburg.com/en/downloads>

## MEASUREMENTS


### 2D Directivity Plot - horizontal

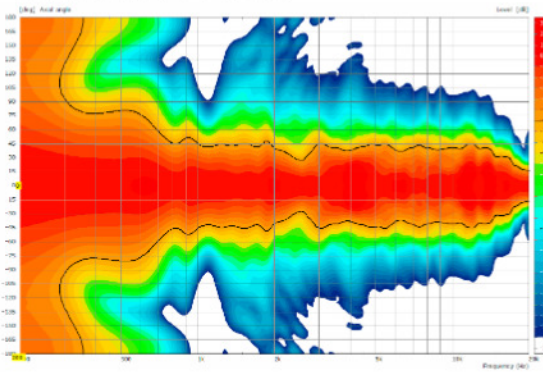


### Sensitivity 1 W @ 1 m + Impedance

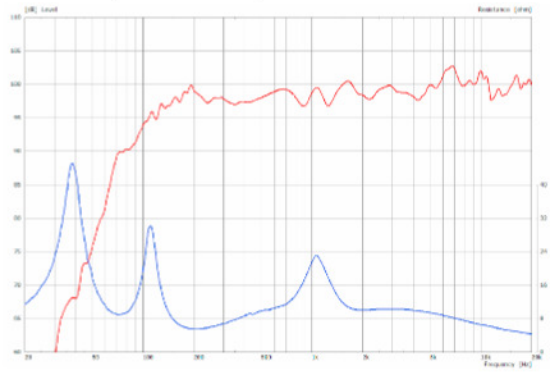

### 2D Directivity Plot - vertical

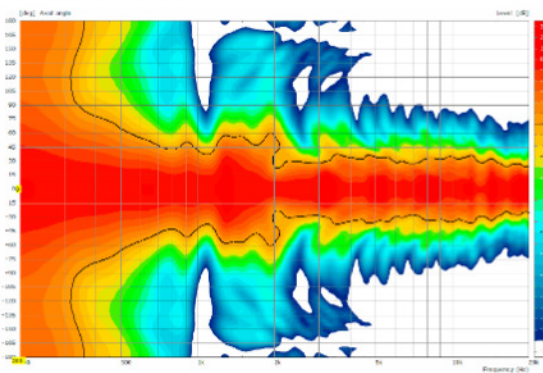

### Frequency Response with Presets

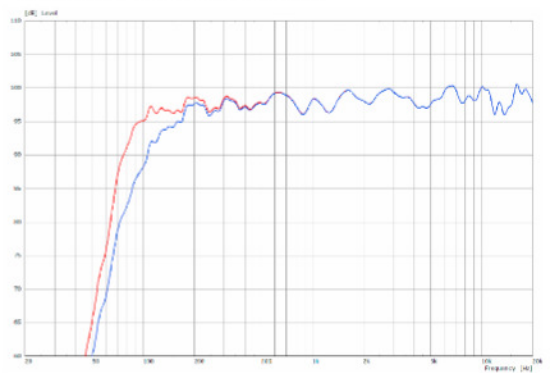

**MultiRigg™**



swiveling fastening solution for horizontal and vertical alignment, for flown / ground stacked / mounted applications, incl. accessories (2 x knurled screw M10 x 20 mm, 1 x handle screw M8 x 55 mm), max. load 50 kg  
Order No. **01360**

**Bracket**



for X 4 horizontal and vertical alignment, incl. (white version: 1 x M10 x 20 socket head screws, black version: 1 x M10 x 20 adjustable handle screw)  
Order No. **01198/set** (RAL 9010)  
Order No. **01198/set**

**Handle Screw**



for flying brackets, adjustable M10 x 20  
Order No. **08375/20**

**Knurled Screw**



M10 x 20 mm  
Order No. **73750/w** (RAL 9010)  
Order No. **73750**

**Knurled Head Screw**



reduction screw for fastening M10 Flange (08126).  
Order No. **73755**

**Flange**



35 mm  $\varnothing$  → M10 x 16 mm, M8 x 20 star knob screw  
Order No. **08126**

**Steel Safety**



6 mm x 600 mm, black, max. load 22 kg (BGI 810-3), quick connector undetachably  
Order No. **01376/6**

**TV Spigot**



10 mm internal thread, 28 mm  $\varnothing$   
Order No. **08128**

**Ring Screw**



M10 – DIN 580  
Order No. **73700** (zincd)  
Order No. **73700/sw** (black zincd)

**Doughty Quick Trigger Clamp**



max. load 100 kg  
Order No. **01223/100 kg**



## ACCESSORIES X 4

### Wall Mount



M10, max. load 15 kg,  
for permanent installation,  
incl. tilt angle stop  
Order No. **08131/F**  
Order No. **08131/F/w** (RAL 9010)

### Wall Mount



with tilt unit, max. load 40 kg  
Order No. **08130**

### Wall Mount



for U-brackets, max. load 40 kg,  
incl. (M10 x 70 mm socket head screw,  
M10 hex lock nut and flat washer)  
for 8"-12" speakers  
Order No. **08130/F/269/w** (RAL 9010)  
Order No. **08130/F/269**

### Cover



for X 4,  
padded  
Order No. **01225/X4**

### Rain Cover



for X 4,  
with zipper  
Order No. **01225/X4/outdoor**

### Flight Case



for 2 pcs. X 4 and 2 pcs. MultiRigg,  
partition walls, heavy duty, 9 mm  
birch multiplex, PVC coated black,  
6 x recessed sprung handles, 1 x  
butterfly catch, 4 x 100 mm blue  
wheels (2 pcs. with brake), interior  
lined with felt  
Size (H x W x D): 63 x 61,5 x 59 cm  
Order No. **16560**



Flight Case



Rain Cover