



**Bass extension for the Galeo S line array featuring integrated flying hardware for flown or ground stacked applications. The classic bass reflex design in combination with flow optimised ports and the high power 15" Neodymium driver provide accurate bass reproduction even in the lowest frequency range.**

## PRODUCT SPECIFICATIONS

<b>Speaker Components</b>	15" Nd
<b>Description</b>	Passive Bass Extension
<b>Power</b> AES / Peak	1000 W / 3000 W
<b>Impedance</b> nominal	8 Ω
<b>SPL</b> 1 W / Peak @ 1 m	100 dB / 135 dB
<b>Usable Range</b>	35 Hz - 220 Hz (-6 dB)
<b>Tuning Frequency</b> excursion minimum	42 Hz
<b>Connectors</b>	2 x Neutrik Speakon NL4MP in/out Coding: 1+/- loop thru, 2+/- Sub
<b>Handles</b>	4 x
<b>Rigging / Fittings</b>	M20 on top and side Wheelboard fittings Integrated flying hardware
<b>Weight</b>	33 kg (+ 7 kg wheelboard)
<b>Size</b> height x width x depth	56,0 x 45,0 x 60,0 cm
<b>Order No.</b>	<b>00460</b>



Ergonomic handle with integrated M20 flange.




Wheelboard Fittings.



Integrated and recessed flying hardware.

## DIMENSIONS

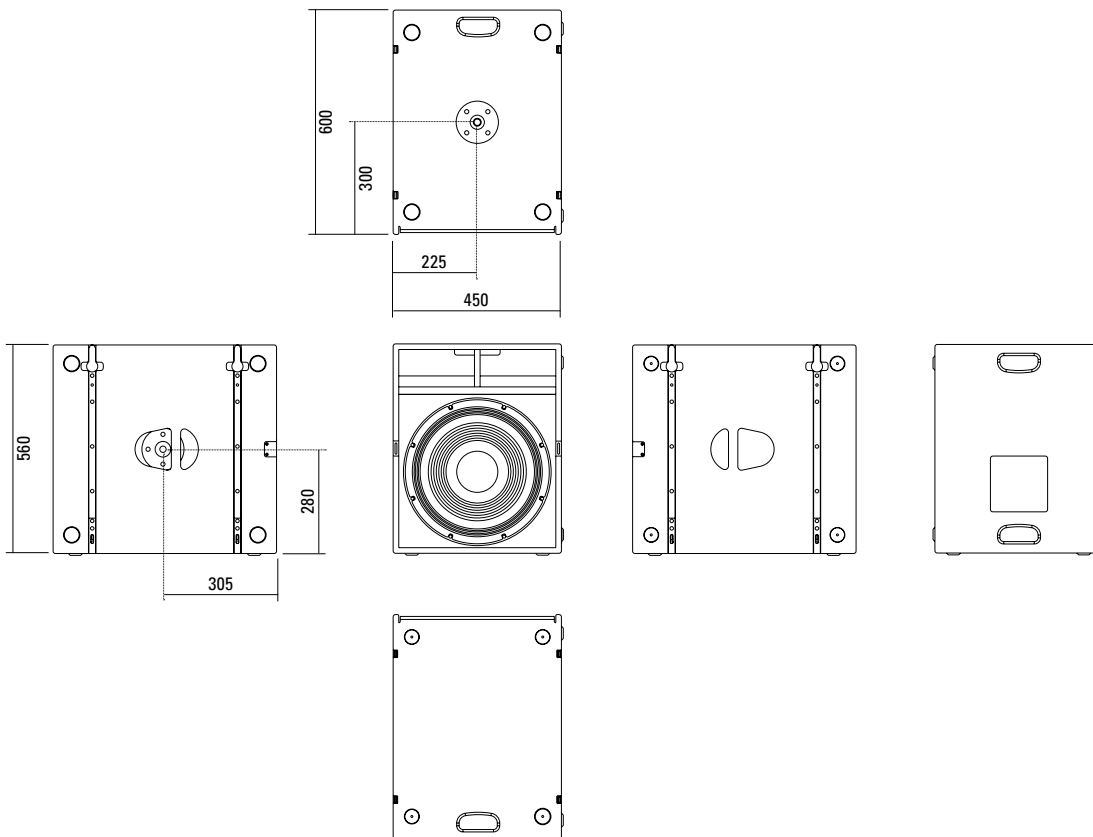


Controller Setups are available on our website:


<http://www.seeburg.net/downloads.php>

## MEASUREMENTS

Frequency Response with Presets

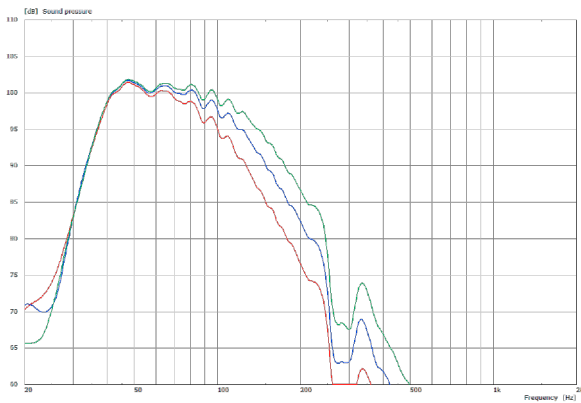

Sensitivity 1 W @ 1 m + Impedance

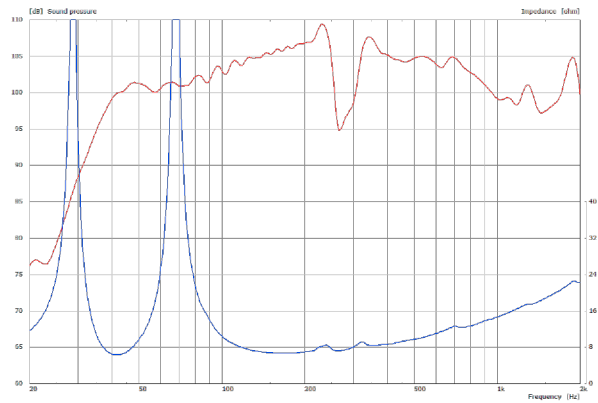

## ACCESSORIES Galeo S Sub

### Flying Frame



for Galeo S / Galeo S Sub,  
incl. accessories  
(3 pcs. 6 x 20 mm ball lock pins,  
load adapter and 100 mm distance  
bar) - also for ground stack.  
Order No. **01310**

### Ball Lock Pin



for Galeo S / Galeo S Sub,  
flying frame and flying cradle  
6,0 x 20,0 mm  
Order No. **01380/6x20**

### Load Adapter



for Galeo S / Galeo S Sub,  
flying frame and flying cradle  
Order No. **01311**

### Clamp Adapter



for Galeo S / Galeo S Sub,  
flying frame and flying cradle-> truss  
Order No. **01313**

### Speaker Pole




M20, with crank, K&M  
Order No. **03023**

### Cover



for Galeo S Sub,  
by using wheelboard  
Order No. **01234/S**

### Wheelboard



for Galeo S Sub,  
also usable as Dolly,  
stackable, 7,0 kg  
Order No. **01269**

### Dolly



for Galeo S Sub, up to 3 units,  
horizontal alignment  
Order No. **01269/D3**

### Dolly



for Galeo S Sub, up to 6 units,  
horizontal alignment  
Order No. **01269/D6**

