



Miniature loudspeaker for applications which require a good sounding system with a low profile.

The powerful 4" wide-range cone driver is capable of delivering undistorted SPL of up to 113 dB (1 W / 1 m). Flexible mounting options and the standard flying bracket make the i4 system an universal tool for near-field applications.

PRODUCT SPECIFICATIONS


Speaker Components	4" wideband
Description	Multi Media Sound System
Power AES / Peak	100 W / 300 W
Impedance nominal	16 Ω
SPL 1 W / Peak @ 1 m	91 dB / 113 dB
Usable Range	150 Hz - 16 kHz (- 6 dB)
Coverage horizontal / vertical	80° - conical
Max. Splay Angle	- - -
Connectors	2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- HiMid, 2 +/- loop thru 1 x Phoenix
Handles	- - -
Rigging / Fittings	3 x M10 / 1 x M6
Weight	1,6 kg
Size height x width x depth	10,3 x 10,3 x 11,6 cm
Order No.	00150/black 00150/white (RAL 9010)



Ultra compact.




DIMENSIONS

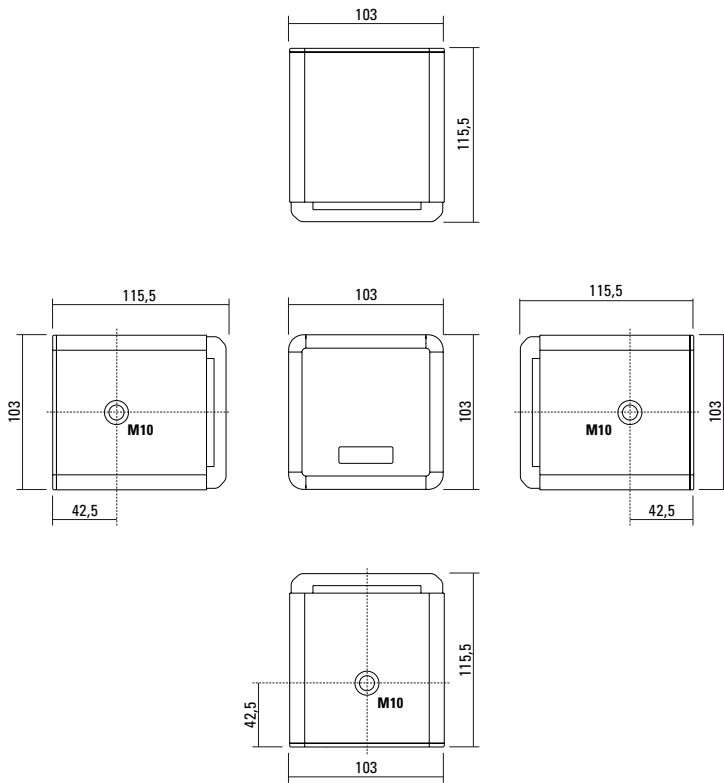

Controller Setups:


<http://www.seeburg.net/en/downloads>

Sensitivity 1 W @ 1 m + Impedance

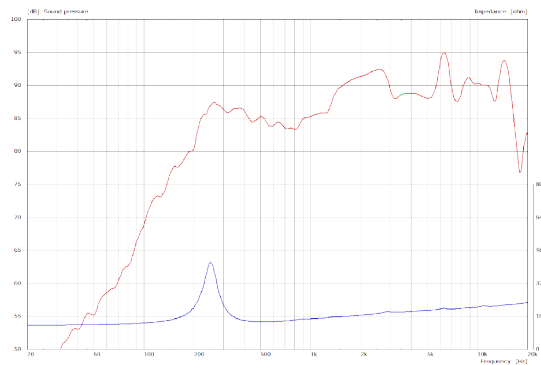


MEASUREMENTS

Frequency Response with Presets

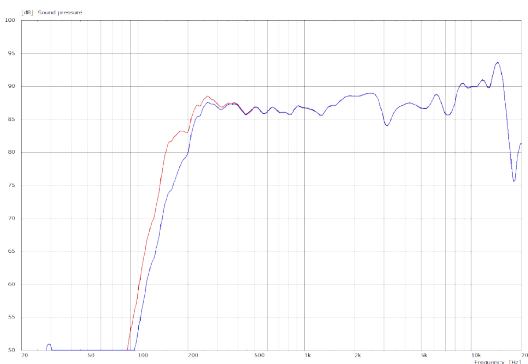

2D Directivity Plot - radial

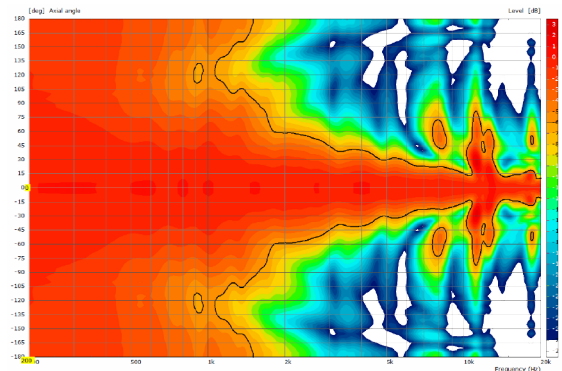

ACCESSORIES i4

Flying Bracket



for i4,
incl. socket screws,
2 x M10 x 20 mm

Order No. **01203**
Order No. **01203/w** (white)

Knurled Screw



M10 x 20 mm

Order No. **73750**
Order No. **73750/w** (white)

Phoenix Connector



2 pol Order No. **08257**
4 pol Order No. **08256**

Truss Clamp



incl. M10 Adapter,
max. load 15 kg
Order No. **01221**

Flange




with ball and socket joint,
with additional locking screw,
M10 x 15, max. load 15 kg
Order No. **08125**

Steel Safety



4 mm x 600 mm, black,
max. load 10 kg (BGI 810-3),
quick connector undetachably
Order No. **01376/4**

Base Plate, Round



M20, K&M,
ø 450 mm, height: 21 mm
black zinc die-cast, felt strips on
the bottom, weight: 6,7 kg
Order No. **01278/round**

Speaker Pole, Light



adjustable, K&M,
incl. M20 Adapter
Order No. **03004/set**

Flight Case



for 4 pcs. i4, with mounted flying
brackets 01203, standard, 7,0 mm
birch multiplex, PVC coated, partition
walls, hinged lid, 1 x recessed sprung
handle, 1 x butterfly catches, rubber
feet, interior lined with felt.

Order No. **16450**

Flight Case



for 8 pcs. i4, with mounted flying
brackets 01203, standard, 7,0 mm
birch multiplex, PVC coated, partition
walls, hinged lid, 2 x recessed sprung
handles, 2 x butterfly catches,
rubber feet, interior lined with felt.

Order No. **16452**

